

# RECYCLER FUNCTIONAL FLEXIBILITY.

## Estimated Water Usage Savings

**Scenario:** A contractor aims to clean 1,500 ft. of pipeline in one day

Traditional Combination Machine	Recycler Combination Machine
Unit Water Capacity: 1,300 Gallons	Unit Water Capacity: 1,000 Gallons
Water Usage per 500ft. of Pipe: 2,600 Gallons (2 Tanks)	Water Usage per 500ft. of Pipe: 2,600 Gallons
Avg. Freshwater Gallons per 1,500 ft.: 7,800 Gallons	Avg. Freshwater Gallons per 1,500 ft.: 7,800 Gallons  <b>(All recycled from pipeline - 0 gallons from freshwater)</b>

### Savings Estimator:

\*Based on the Recycler Combination Machine utilizing water that was in the pipeline to begin with. No water usage from the Recycler water tanks or other water connections (ie. Hydrants).

- Daily Water Savings: 7,800 Gallons
- Weekly Water Savings: 34,000 Gallons
- Monthly Water Savings: 136,000 Gallons
- Annual Water Savings: 1,632,000 Gallons



969 Hall Park Road | Green Cove Springs, FL 32043 | USA  
PHONE (904) 284-4200 | FAX (904) 284-3305  
www.vac-con.com | vns@vac-con.com

A subsidiary of Holden Industries, Inc., Vac-Con is a 100% employee-owned company.  
©2019 Vac-Con, all rights reserved.






THE COMBINATION MACHINE YOU TRUST IS NOW AVAILABLE WITH A RECYCLING SYSTEM FOR ENDURANCE AND PERFORMANCE. THE VAC-CON RECYCLER BOASTS FEATURES TO PROVIDE OPERATORS WITH FUNCTIONAL FLEXIBILITY TO SAVE TIME, INCREASE EFFICIENCY, AND GET THE JOB DONE.

\*SOME COMPONENTS SHOWN ARE NON-STANDARD.

**AS SHOWN:**

- |  |  |                  |
|--|--|------------------|
| 1. HPT Single Piston Water Pump fitted with 3 accumulators for smooth, continuous flow | 9. Charge Pump   | 18. Arrow Board  |
| 2. Hydraulic Oil Reservoir   | 10. Folding Pipe Rack  | 19. Strobe Light |
| 3. Centrifugal Compressor Quiet Package  | 11. All-Aluminum Tool Boxes  |                  |
| 4. Cross-Linked Polyethylene Water Tanks –holds up to 1,000 gallons                    | 12. 10 ft. Telescopic Boom   |                  |
| 5. 3-Stage Fan   | 13. Hinged Boom Tie Down   |                  |
| 6. 180° Articulating Hose Reel   | 14. Flat-Style Rear Door with Wedge-Style Locks                          |                  |
| 7. Omnibus® Precision Power Operating System   | 15. Hydro-excavation High Pressure 50 ft. Retractable Hand Gun Hose Reel |                  |
| 8. Dual Aluminum Roller Level Wind Guide   | 16. 5 in. Butterfly Decant Valve   |                  |
|  | 17. Splash Shield  |                  |

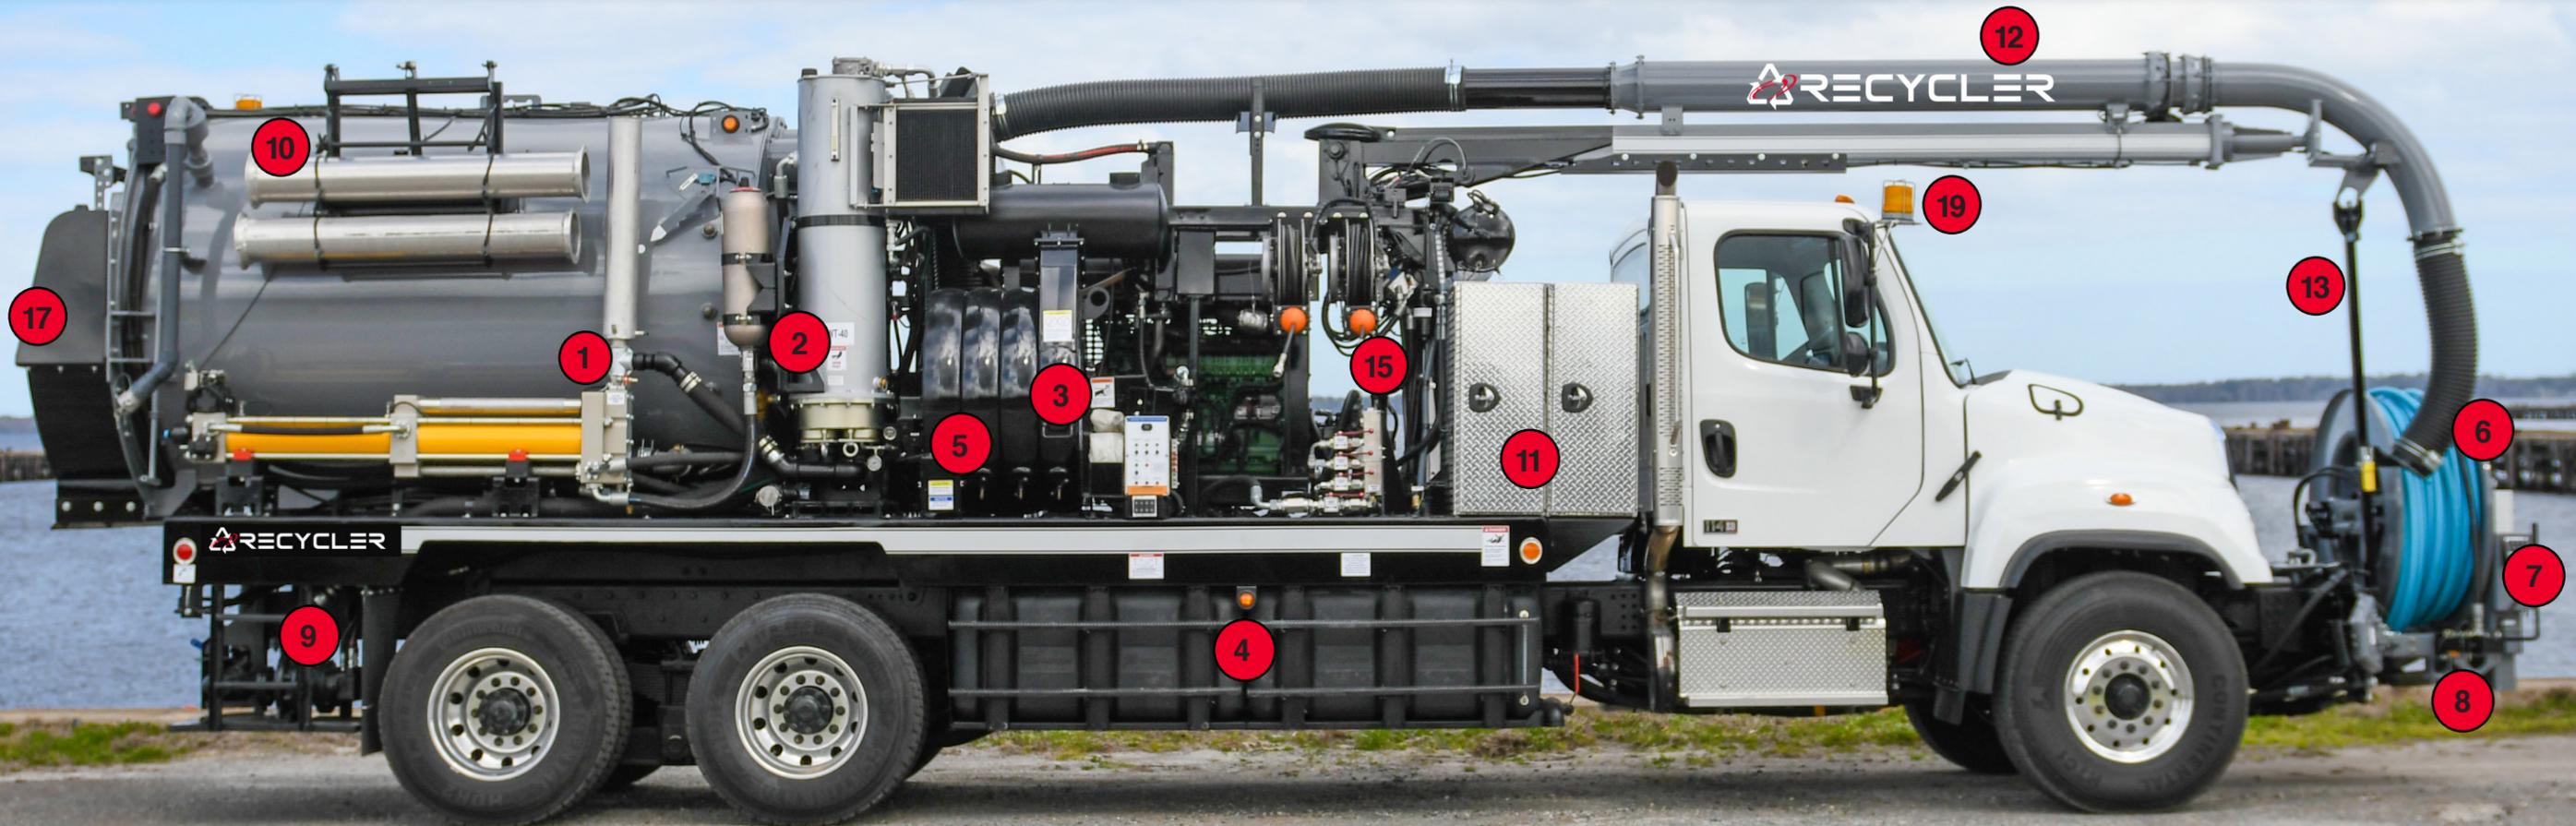

- Available in Single and Dual Engine Configurations
- Simple, User-Friendly Operation
- Save Time and Money



**FILTRATION:**

- 2-Stage Water Filtration
- Stainless Steel 1st-Stage Filter for Removal of Large Particulate
- Self-Cleaning, Stainless Steel 2nd-Stage Filter
- High-Pressure Back-Flush Assembly (2,000 PSI)
- Wear-Resistant Wiper Cleaning